DD-9/7

Technical Data

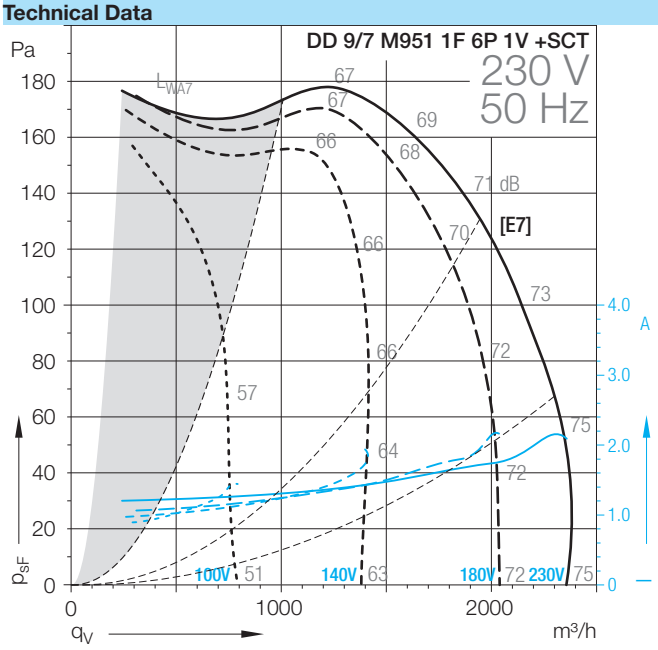

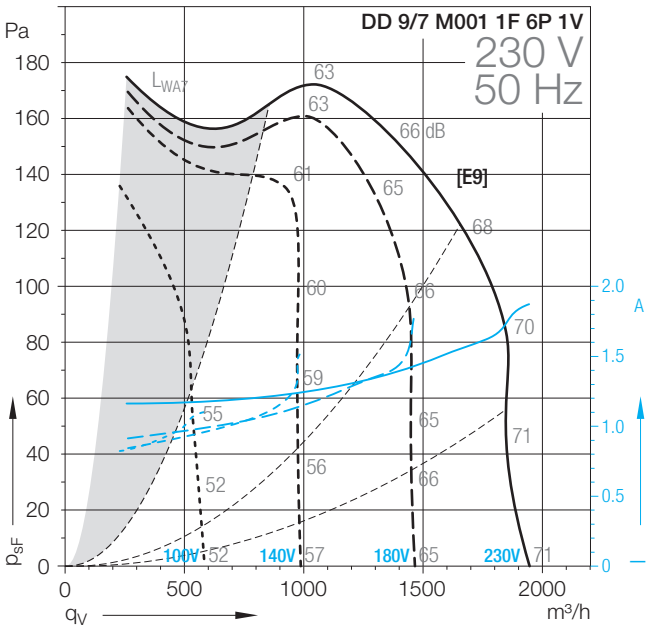

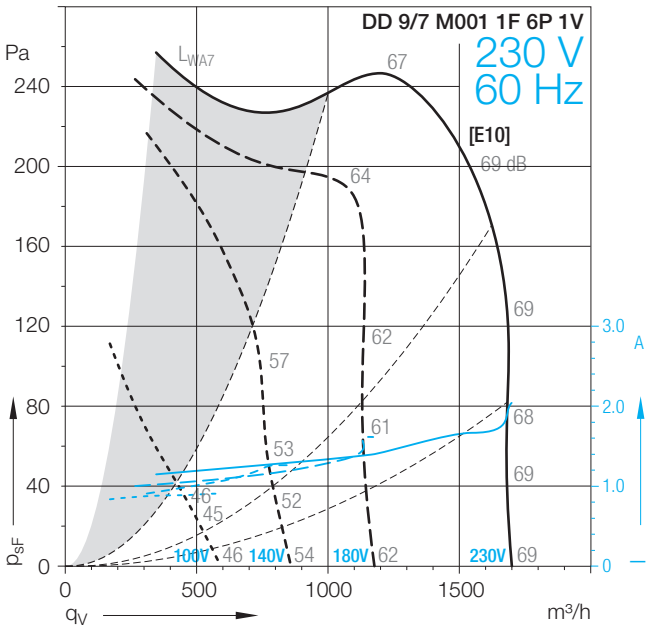

DD-9/7

Technical Data

DD 9/7	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
M951 1F 6P 1V +SCT	(1)	[E7]	245	6	1~		50	454	2.1	850
M001 1F 6P 1V	(1)	[E9/E10]	147	6	1~		50/60	406	1.8	825

Technical Data

DD 9/7	Operating Capacitor µF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
M951 1F 6P 1V +SCT	8	500	IP32	F	INT	40	12	1.2	B	6M09HF
M001 1F 6P 1V	5	500	IP20	F	EXT	40	10	1.2	B	6M0306

(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7}, see „Technical Description“.

Dimensions in mm, subject to change.

DD 9/7 M951 1F 6P 1V +SCT

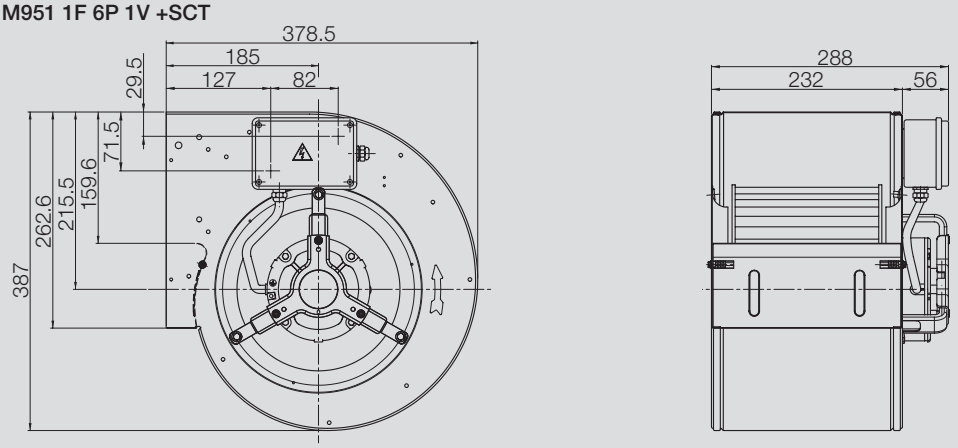
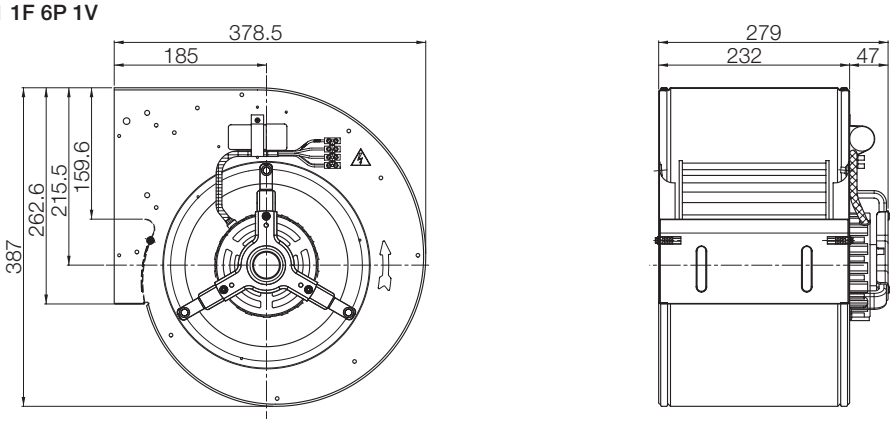
DD 9/7 M001 1F 6P 1V